

## CAN AM X3 KWIK LOCK BELT CHANGE TOOL

# PART NUMBER(s): KWIKLOCKX3

#### WE ARE NOT RESPONSIBLE FOR ANY DAMAGES. BE VERY CAREFUL TO NOT DAMAGE YOUR CLUTCH DURING THIS PROCESS.


## TOOLS NEEDED

- 17mm -Socket
- Torque Wrench
- 8mm Allen Wrench
- T30 Torx
- Blue Locktite

## **ESTIMATED INSTALL TIME**

10 MINUTES

- 1) Remove belt box cover. (T30 Torx)
- 2) Remove CVT belt. (Clutch Belt removal tool)
- 3) Remove secondary clutch bolt and washer these will NOT be re used. (17mm Socket)
- 4) Install the KWIK LOCK bolt and quick change washer bushing to replace the OEM bolt and washer; **USE BLUE LOCKTITE!** 
  - a) (**IF YOU HAVE THE KWI Float Mod**) Use the included float spacer that has a larger hole to fit the KWIK LOCK secondary bolt. Discard your original float spacer. Shim secondary clutch to align belt in accordance with the KWI Fload Mod Instructions.
  - b) (**No KWI Float Mod**) Install the KWIK LOCK bolt and quick change washer as you would the OEM bolt and washer. **USE BLE LOCKTITE!**
- 5) Secure secondary clutch on crankshaft by torquing the secondary clutch bolt to bolt manufacturer specs.(17mm Socket)(Torque Wrench) Use a long 1/4" or 3/8" extension thru the helix and spring or a KWI Vorhees Vise clutch holding tool to hold secondary while torquing.
- 6) Reinstall CVT belt using your new KWIK LOCK tool
- 7) Reinstall belt box cover.

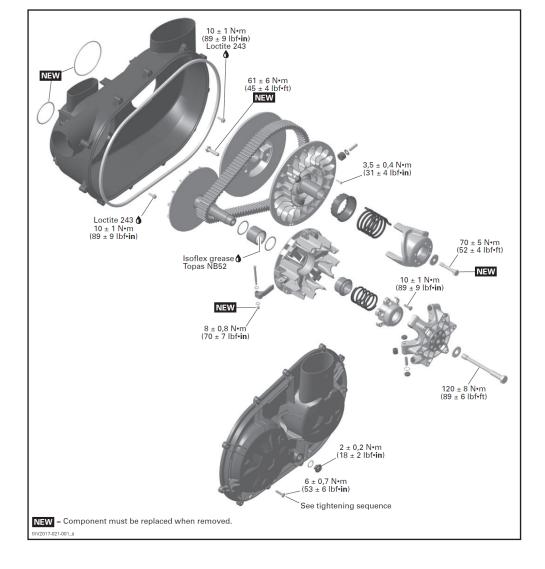

#### KWIKLOCKX3 PARTS INCLUDED

PART DESCRIPTION	QTY	OEM PART #	OUR PART #
KWIK LOCK BELT CHANGE TOOL	1	—	KLT
M10 X 1.5 X 100MM SCREW	1	—	M10
KWIK LOCK WASHER BUSHING	1	—	KLW
		—	—
		—	—
		_	—

LIABILITY STATEMENT As defined by the Magnuson-Moss warranty Act. Do not install any performance parts or services unless you have the technical ability to properly set-up the entire machine to compensate for the installation of those parts. The necessary work and expertise needed to install different product varies. Instructions, where provided, are given to assist in installation only; they are not a substitute for mechanical experience in setting up racing vehicles. References to performance gains, reliability, ease of installation, etc. are based on our and outside customer's experiences. This is not a guarantee of similar performance in every installation. While we sell proven products, in the end it's up to the individual to make the most of the product. Aris Werth Inc. d.b.a. KWI Clutching or its associated corporations assumes no responsibility for damage or injury of any kind because of misuse, improper installation or improper application of any parts in anyway, by any person. Contact your local dealer to schedule installation of this kit if you are not a qualified ATV or UTV mechanic. USE OF PRODUCTS, BUYER SHALL USE, AND REQUIRE ITS EMPLOYEES, CONTRACTORS, AND AGENTS TO USE, ALL AVAILABLE SAFETY PRECAUTIONS, IN ADDITION TO ANY SPECIFICALLY SET FORTH IN ANY MANUALS, MATERIAL SAFETY DATA SHEETS, TECHNICAL DATA SHEETS, INSTRUCTION SHEETS, IF AWY, FURNISHED BY SELLER (OR AVAILABLE FROM RAW MATERIAL SUPPLIERS) RELATING TO SELLER'S PRODUCTS. IF BUYER POS NOT RECEIVE ANY REQUIRE DATERIAL SAFETY DATA SHEETS FOR ANY PRODUCT FROM SELLER, BUYER WILL REQUEST THEM FROM SELLER. IF BUYER FAILS TO STRICTLY OBSERVE EACH AND EVERY ONE OF THE OMEGAN NATIONAL STANDARDS INSTITUTE OR OCCUPATIONAL HEALTH AND SAFETY ACT, OR OTHER APPLICABLE WORKPLACE LAW, REGULATION, OR STANDARD, BUYER WILL INDEMNIFY, DEFEND, AND HOLD HARMLESS SELLER AND SELLER AND TS EMPLOYEES, OFFICERS, DRECTORS, AGENTS, AFFILIATES, SUCCESSORS AND ASSIGNS FROM AND AGAINST ANY AND ALL CLAINS, DEMANDS, DAMAGES, ACTIONS, AND CAUSES OF ACTIONA, SWELLAS ANY A